

User Manual

- Device Management
- Web/Cloud-Based Service
- Real-time, Seamless Reporting
- Job/Work Management
- Pop-up Alerts/Messages

BELIEVE YOUR EYES



VIEW PRO MANAGER

CLOUD MANAGEMENT SYSTEM

www.inno-viewpro.com

Please read this manual before operating your fusion splicer, and keep it for future reference.


Content

Preface

- 1. Preparation..... 3
- 2. Network Setting..... 3
- 3. Access to VIEW PRO MANAGER Website..... 4
- 4. Create New Account..... 4
- 5. Register the Device..... 5
- 6. Feature of VIEW PRO MANAGER..... 6
 - 6.1 Monitor..... 6
 - 6.2 Record..... 6

1. Preparation

- * Load battery and turn on the device.
- * Detach the SIM card Tray from under the USB cover of the splicer
- * Insert Nano SIM card to slot on the right side of machine.



Mini-SIM
(Standard-size)




Micro-SIM




Nano-SIM

***Only Nano-SIM Card Support**


2. Network Setting

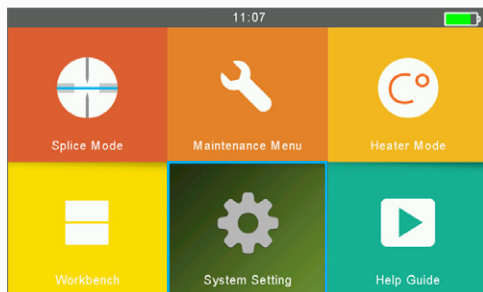

1) Go to “System Setting”

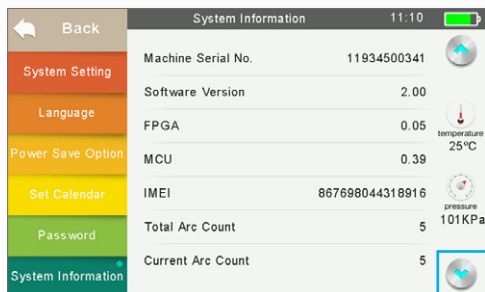

2) Go to second page of System Setting

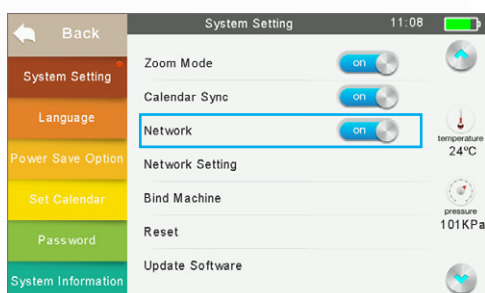



3) Check “Network” is **ON**

- * Networks status can be observed on workbench interface
- * Check Network and GPS activation icon on workbench (GPS signal is activated at open area)

ICON	Description
	GPS is activated
	GPS is not activated
	Network is activated
	Attempt to activate Network
	No SIM Card



- * In case of Network fail, please refer to below.
 - SIM card should be unlocked. [Smartphone- setting- “Set up SIM card lock”]
 - Enter the APN information manually on “Network Setting”
 - If APN requires password, enter it to Network setting on the splicer. [Splicer- System menu-Network Setting]

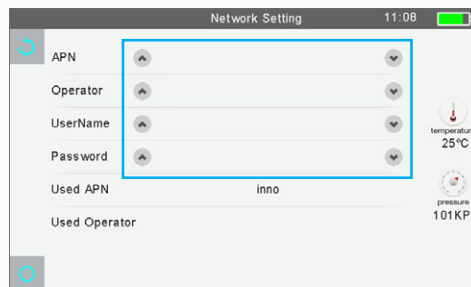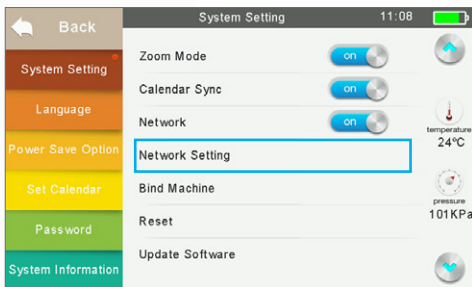


3. Access to the VIEW PRO MANAGER

- * Enter to View Pro Manager (<https://www.inno-viewpro.com>)






4. Create New Account

- * Create new account with your e-mail address

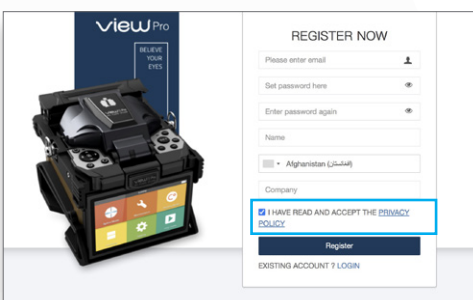



5. Register the Device

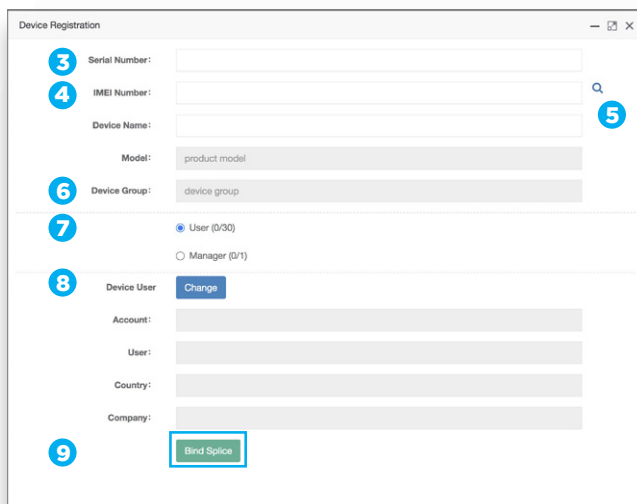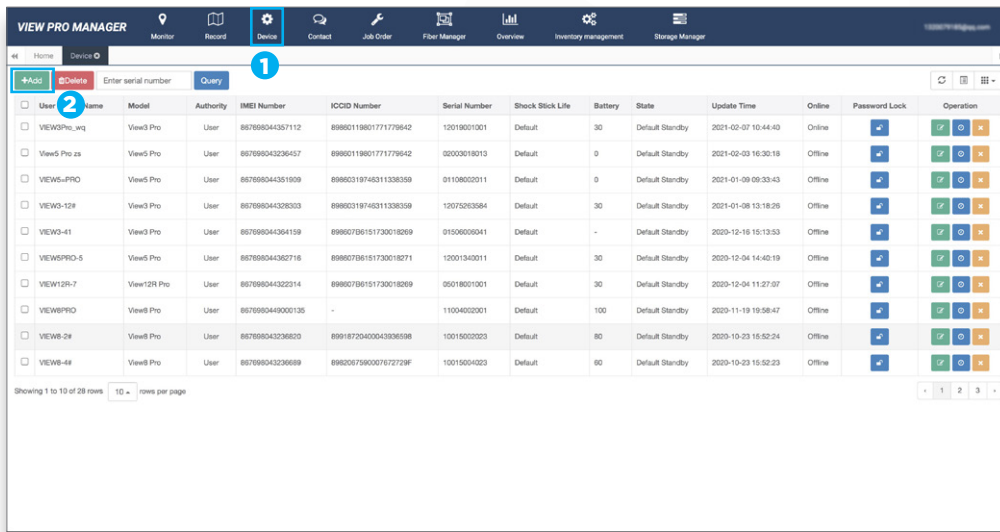

- 1) Go to “Device” menu
- 2) Click “Add” button
- 3) Enter the Serial Number
- 4) Enter the IMEI Number
- 5) Click  button
- 6) Select Device Group
- 7) Select Your Authority
- 8) Click “Change”
- 9) Click “Bind Splice”

- * Serial number & IMEI number can be found on system information
- * Manager Authority : Able to delete a User and Lock the splicer remotely
- * User Authority : Only available to access for device data

- 10) Go to “System Setting” of Splicer
- 11) Click “Bind Machine”

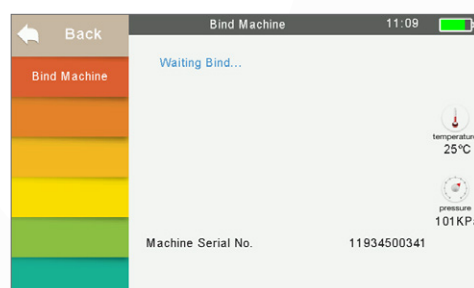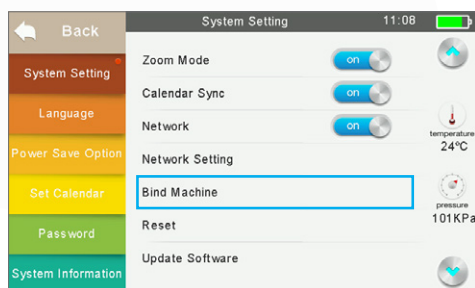

- 12) Tap “Accept”
- 13) Splicer is now registered on VIEW PRO MANAGER cloud

6. Feature of VIEW PRO MANAGER

6.1 Monitor

No.	Date	Time	Name	User Account	Model	Estimate Loss	Splice Mode	Left Angle	Right Angle	Location	SNK
1	2021-02-07	11:34:00	VIEW3Pro_wq	1320079185@qq.com	View3 Pro	0.2	MM2um	66.300003	4.7	37.500482,122.026329	12019001001
2	2021-02-07	11:31:00	VIEW3Pro_wq	1320079185@qq.com	View3 Pro	0.2	MM2um	66.300003	4.3	37.500482,122.026329	12019001001
3	2021-02-07	11:14:00	VIEW3Pro_wq	1320079185@qq.com	View3 Pro	0.2	MM2um	66.300003	3.8	37.500652,122.026545	12019001001
4	2021-02-07	10:59:00	VIEW3Pro_wq	1320079185@qq.com	View3 Pro	0.2	SM_SM	66.300003	0.2	37.505161,122.027885	12019001001
5	2021-02-07	10:58:00	VIEW3Pro_wq	1320079185@qq.com	View3 Pro	0.09	SM_SM	66.300003	0.1	37.505161,122.027885	12019001001



- 1) Device list with status icons (electrode warning, battery, SW version).
* Default grouping cannot be deleted.
- 2) Add/Remove group, group management.
- 3) Splice data of selected devices (User, Model, Estimated loss, Location, etc).
- 4) Select the period to search splice data
- 5) Current device location with device information (location, name, model, etc).

6.2 Record

No.	Date	Time	Name	User Account	Model	Estimate Loss	Splice Mode	Left Angle	Right Angle	Location	SNK	Result
1	2021-02-07	11:34:00	VIEW3Pro_wq	1320079185@qq.com	View3 Pro	0.2	MM2um	66.300003	4.7	37.500482,122.026329	12019001001	Pass
2	2021-02-07	11:31:00	VIEW3Pro_wq	1320079185@qq.com	View3 Pro	0.2	MM2um	66.300003	4.3	37.500482,122.026329	12019001001	Pass
3	2021-02-07	11:14:00	VIEW3Pro_wq	1320079185@qq.com	View3 Pro	0.2	MM2um	66.300003	3.8	37.500652,122.026545	12019001001	Pass
4	2021-02-07	11:09:00	VIEW3Pro_wq	1320079185@qq.com	View3 Pro	0.2	SM_SM	66.300003	3.3	0.0	12019001001	Pass

- 1) Period selection and data type for selected devices.
 - Marker: Splice point with count information on the map.
 - Ployline: Travel route of the device on the map.
- 2) Splice point with count information.
- 3) Splice data in detail for selected period.
- 4) Available to export filtered splice data into excel file.
 - Location of device which has no previous GPS record is saved to "0, 0" .

- More Introduction and guidance can be found in “HELP” under account menu. (Under developing)

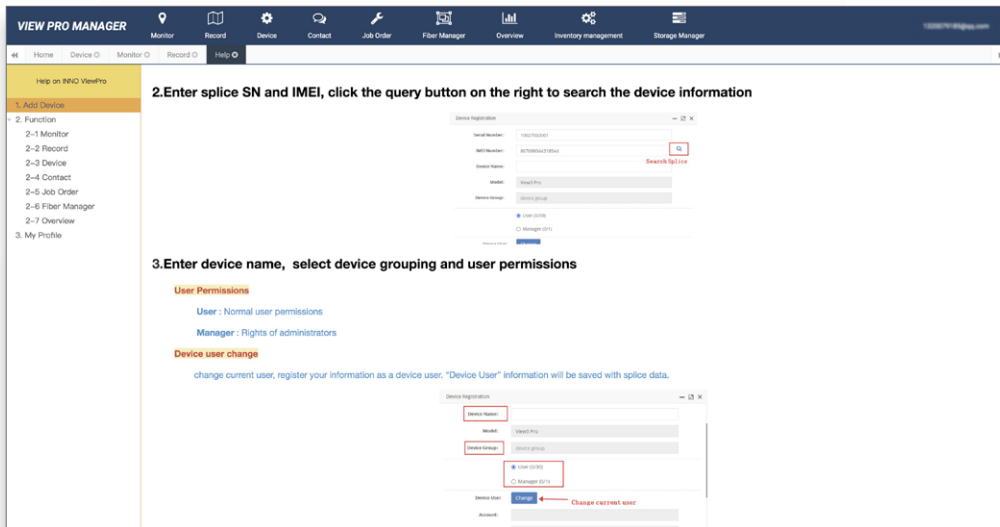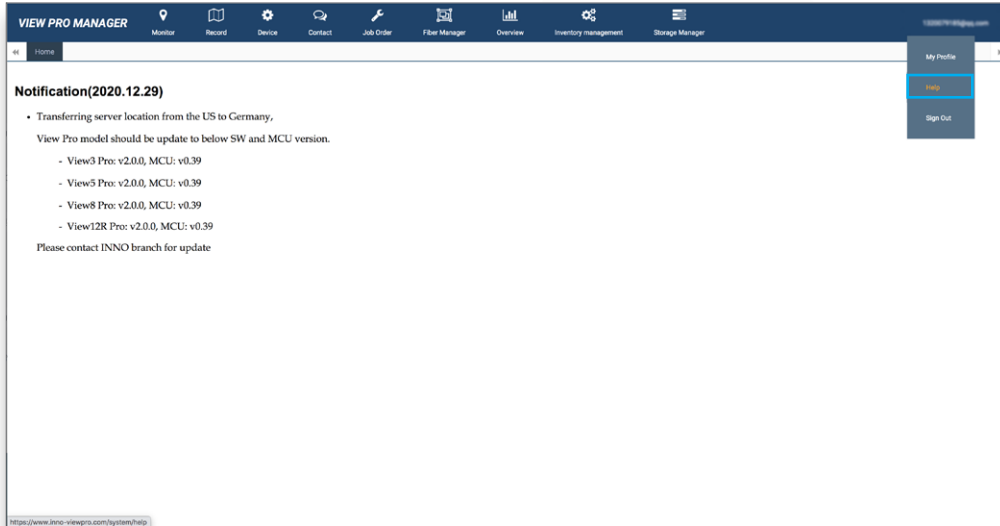

The End

* Products models and specifications are subject to change without prior notice.



You dream,
We **DESIGN**

Copyright©2019INNOInstrumentInc. All rights reserved.
E-22F, 30, Songdomirae-ro, Yeonsu-gu, Incheon21990, Republic of Korea
Tel 82-32-837-5600 Fax 82-32-837-5601