



VIAVI

INX 760 Probe Microscope

Automated single and multifiber connector inspection and analysis

Elevating Fiber Inspection: Faster, Simpler, Stronger, Smarter

The INX[™] 760 is the ultimate tool for field technicians, offering unparalleled efficiency in ensuring pristine fiber connections. As the culmination of over 25 years of pioneering innovation and expertise, it stands as the apex of next-generation fiber end face inspection and analysis.

While fiber inspection has become a standard practice for many field technicians, contamination still continues to be the #1 cause of optical network problems. With new connector types emerging, greater connector volumes used in the field, and an increase in new fiber technicians, the industry has reached an inflection point, causing the need for a new inspection solution – the INX 760.



INX 760 Probe Microscope

Benefits

- Faster Get results faster with true automated operation in seconds
- Simpler Simplify fiber inspection with easy automated inspection of multi-fiber, singlefiber, and duplex connectors
- Stronger Ensure performance you can depend on with a strong and durable microscope that delivers excellence in the field
- Smarter Achieve inspection excellence with trusted results

Features

- True Automated Inspection delivers the industry's fastest workflow for user applications that automates every step of the inspection process.
- AutoID Inspection Tips eliminate mistakes of error-prone manual or RFID configuration when changing tips.
- PanOptic Imaging Engine ensures edge-toedge field-of-view without compromising magnification and resolution quality.
- VIAVI TPA Enabled, ensuring alignment, efficiency, and accuracy at every stage of a job with Test Process Automation.

Applications

- Datacenters
- Central offices
- Head ends
- Enterprises
- Aerospace

Elevating Fiber Inspection

With remarkable speed, simplicity, and precision, the INX 760 effortlessly addresses the diverse connector types and applications prevalent in today's evolving fiber optic networks to Inspect Before You Connect and ensure fiber network excellence with unmatched ease for any connector, in any environment, every time.



FASTER

Get results faster with true automated operation in seconds

With a complete process taking under 10 seconds for a 12x1 multifiber connector, 6 seconds for duplex connectors, and 5 seconds for simplex connector, the INX 760 equips field technicians to ensure clean fiber connectors in record time, every time.

Flawless Fiber Connections...Fast



SIMPLER

Simplify fiber inspection with automated configuration, operation and job management.

As multifiber connector adoption grows, technician workflows increasingly require inspecting a mix of multifiber, VSFF duplex, and simplex connectors.

The INX 760 microscope is the all-in-one microscope for all connector categories. Inspecting a multifiber or duplex connector is as easy as inspecting a simplex connector.

Effortless Inspection...Any connector





STRONGER

Ensure performance in any environment with a microscope that delivers excellence in the field.

The INX 760 microscope is a field tool. The rugged stainless-steel tips thread securely onto a steel chassis that protects the optical system during field use. A textured, ergonomically shaped handle provides a secure grip, with and without gloves. An energy absorbing overmold protects the microscope from damage due to handling in harsh field conditions.

Performance You Can Depend On...Everywhere



SMARTER

Achieve inspection excellence with trusted results for any connector.

The INX 760 microscope produces automated analysis results that are accurate and repeatable. Accuracy ensures that even the smallest defects are detected and used to assess the condition of the connector end face, minimizing the occurrence of false passes and dirty fibers being placed into service. Repeatability, obtaining the same result test after test, provides confidence in the inspection test results.

Results You Can Trust...Always

Achieve Faster Workflow with True Automated Operation

The INX 760 automates every step of the inspection process to deliver fast, reliable, and repeatable results without any hassles. With the ability to support simplex, duplex, and multi-fiber connector types, users simply attach the appropriate tip and inspect. The INX 760 microscope automates setup, image focus, camera panning, image analysis, and results storage; which can occur both on the device or to the VIAVI TPA ecosystem.



Fully Automated with INX 760

SETUP → IMAGE FOCUS → IMAGE PANNING → ANALYSIS → RESULTS STORAGE

With complete cycle times under 5 seconds for simplex and 10 seconds for MPO 12x1 multi-fiber connectors combined with the industry's fastest tip changing process, the fully automated capability of the INX 760 equips technicians with the industry's fastest workflow in fiber connector inspection.

AutoID Inspection Tips Ensure Hassle-Free Simplicity

INX 760 utilizes the new FPT series of inspection tips. Designed for use in any field environment, each rugged stainless-steel tip is equipped with AutoID technology that auto-configures the INX 760 for the type of connector under test without any additional steps or mistakes that occur with manual or RFID configuration methods.

- Easily switch between any connector type
- Automatically configures the optical setting parameters
- Automatically recalls the last Analysis Profile for the attached tip
- No additional optical attachments required
- Rugged stainless steel design
- Fast-threading coupling collar
- Visual feedback upon connection



Tips for simplex, duplex, and multi-fiber connectors



Easy attachment to the INX 760




Each tip equipped with AutoID technology

For Tips catalog, visit: <u>viavisolutions.com/INX760</u>


See What Other Microscopes Can't

The INX 760 features our revolutionary PanOptic Imaging Engine, which ensures an edge-to-edge field-of-view without compromising magnification and resolution quality. By using the same optical chain throughout the entire process, the INX 760 delivers optimized performance across the board in image quality, analysis reliability, and overall speed.

The PanOptic Imaging Engine revolutionizes multi-fiber connector inspection by providing both wide Field-of-View images with full visibility of the alignment pins and guide holes at the edge and thorough details of each individual fiber in the array; all in under 8 seconds.

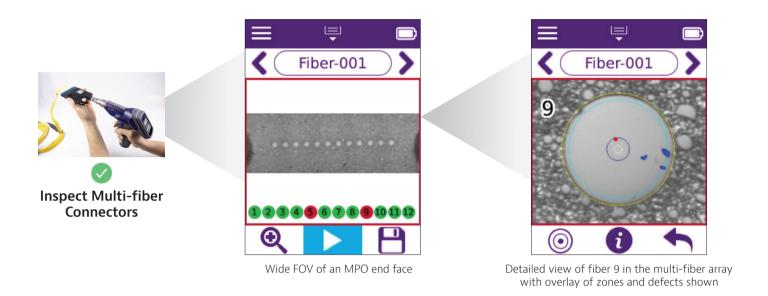

Duplex fiber connectors can be inspected in a single test, delivering a side-by-side view and analysis of both connectors in under 5 seconds.

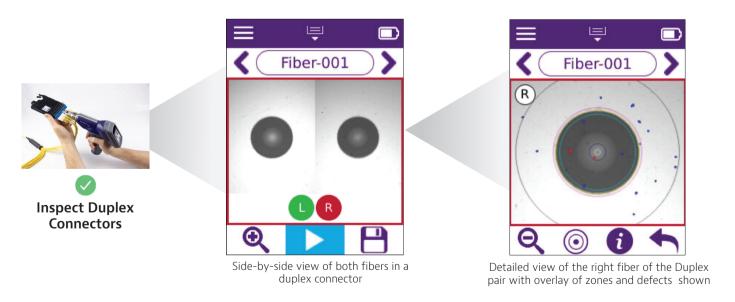


Key Features



Stay Connected with VIAVI TPA

INX 760 connects with the VIAVI TPA ecosystem to streamline field workflows, boost productivity, and increase visibility. This systematic, closed-loop workflow solution connects teams with their VIAVI test instruments to ensure repeatability, efficiency, and accuracy at every stage of a job.



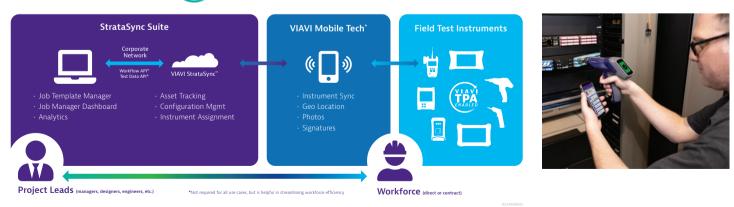

To learn more visit: viavisolutions.com/tpa

Specifications

Parameters	Specification					
Field of view	Multifiber: 6400 x 1425 μm					
Field of view	Simplex: 1000 x 1425 μm					
View modes	Live, Inspected					
Magnification modes	Low, High (auto center)					
Focus	Auto (on insert, triggered), Manual (simplex, duplex)					
Panning	Auto (duplex, multifiber), Manual (multifiber)					
Image analysis	Auto: IEC 61300-3-35 edition 2, IEC 61300-3-35 edition 3					
	Save: triggered, auto if pass, auto always					
Test results	Simplex: ≤ 10,000, Duplex: ≤ 5,000, MPO 12x1: ≤ 1,500 saved					
	Or proportional combination of the above					
Auto focus + pan + analysis	Simplex: ≤4 s, Duplex: ≤5 s, MPO 12x1: ≤8 s					
Auto save	Simplex: ≤1 s, Duplex: ≤1 s, MPO 12x1: ≤2 s					
Hard buttons	Power, trigger, wheel					
Display	320 x 240-pixel (2.4 in) color backlit touch screen					
Status indicators	LED ring, power/battery charging LED, speaker					
Power supply	5V/2.1A USB AC adapter					
Battery	Li-ion (field serviceable)					
Operating time	> 4 hr (1 MPO 12x1 test + save/min)					
Wired connectivity	USB-C port with optional locking mount					
Wireless connectivity	Bluetooth® 5.2 BLE, Wi-Fi 802.11b/g/n					
Mounting point	1/4 inch diameter, 20 threads per inch (1/4-20) socket					
Operation temperature	0 to 40°C (32 to 104°F)					
Operation humidity	0 to 90% non-condensing					
Storage temperature	-20 to 60°C (-4 to 140°F)					
Dimensions (L x H x W)	253 x 191 x 60 mm (9.9 x 7.5 x 2.4 in) without a tip					
Differisions (F x H x vv)	275 x 191 x 60 mm (10.8 x 7.5 x 2.4 in) with an LC tip					
Weight	0.665 kg (1.5 lb) without a tip					
	Simplex, Duplex, Multifiber (rows ≤2, fibers/row ≤16)					
Inspection tips	Integrated AutoID technology					
	Stainless steel with threaded mounting nut and tether point					
VIAVI TPA compatibility	VIAVI Mobile Tech 5.2 or later, StrataSync 16.1 or later					
PC reporting software	ReportPRO™					

Ordering Information

Kits

Part Number	Description					
	INX 760 Microscope: Automated Simplex Multifiber Inspection, BT Wi-Fi Connectivity					
INIV 7CO VIT1	Tips: Bulkhead tips for MPO/PC, MPO/APC					
INX-760-KIT1	Mating adapters: MPO					
	Accessories: Tip cover, tip storage case, USB charging adapter and cable, carrying case					
	INX 760 Microscope: Automated Simplex Multifiber Inspection, BT Wi-Fi Connectivity					
INV 760 MITO	Tips: Bulkhead tips for MPO/PC, MPO/APC, LC/PC, LC/APC, SC/PC, SC/APC					
INX-760-KIT2	Mating adapters: MPO, LC duplex, SC duplex					
	Accessories: Tip cover, tip storage case, USB charging adapter and cable, carrying case					

Tips

Part Number	Description				
FPT-LC	Tip LC PC Bulkhead for INX				
FPT-LC-A	Tip LC APC Bulkhead for INX				
FPT-LC-L	Tip LC PC Bulkhead Long Reach for INX				
FPT-LC-D	Tip LC PC Bulkhead Duplex for INX				
FPT-SC	Tip SC PC Bulkhead for INX				
FPT-SC-A	Tip SC APC Bulkhead for INX				
FPT-CS	Tip CS PC Bulkhead for INX				
FPT-SN	Tip SN PC Bulkhead for INX				
FPT-MDC	Tip MDC PC Bulkhead for INX				
FPT-MPO	Tip MPO PC Bulkhead for INX				
FPT-MPO-A	Tip MPO APC Bulkhead for INX				
FPT-MPO-A6	Tip MPO PC Bulkhead Angled for INX				
FPT-MPO-A-A6-U	Tip MPO APC Bulkhead Angled Key Up for INX				
FPT-MPO-A-A6-D	Tip MPO APC Bulkhead Angled Key Down for INX				

Accessories

100000110				
Part Number	Description			
FPT-MPO-COUPLER	MPO Bulkhead Mating Adapter for INX			
ZP-HW-00457	SC Duplex Bulkhead Mating Adapter			
ZP-HW-00458	LC Duplex Bulkhead Mating Adapter			
FPP-INX7-HOLSTER	Holster for INX-7 Probe			
FPP-INX7-TIPC	Tip Cover for INX-7 Probe			
FPP-INX-TCASE1	Tip Case for INX			
FPP-INX7-BATTERY	Rechargeable Battery for INX-7 Probe			
FCPP-PS1	USB Output AC Input Charger with US EU UK AU Adapters			
FBPP-DPAC9	Type C USB Male to Type A USB Male Cable			
FCLP-LAN-10	Tip Lanyard 10 cm			

VIAVI Care Support Plans

Increase your productivity for up to 5 years with optional VIAVI Care Support Plans:

- Maximize your time with on-demand training, priority technical application support and rapid service.
- Maintain your equipment for peak performance at a low, predictable cost.

Plan availability depends on product and region. Not all plans are available for each product or in every region. To find out which VIAVI Care Support Plan options are available for this product in your region, contact your local representative or visit: viavisolutions.com/viavicareplan

Features *5-year plans only

Plan	Objective	Technical Assistance	Factory Repair	Priority Service	Self-paced Training	5 Year Battery and Bag Coverage	Factory Calibration	Accessory Coverage	Express Loaner
BronzeCare	Technician Efficiency	Premium	√	√	✓				
SilverCare	Maintenance & Measurement Accuracy	Premium	√	✓	√	√ *	✓		
MaxCare	High Availability	Premium	√	√	✓	√ *	✓	√	√



Contact Us

+1 844 GO VIAVI (+1 844 468 4284)

To reach the VIAVI office nearest you, visit viavisolutions.com/contact

© 2024 VIAVI Solutions Inc.
Product specifications and descriptions in this document are subject to change without notice.
Patented as described at viavisolutions.com/patents inx760-ds-fit-nse-ae 30194039 900 0124